


Manual Linear Stages, X & XY axes (Crossed-Roller Bearings)

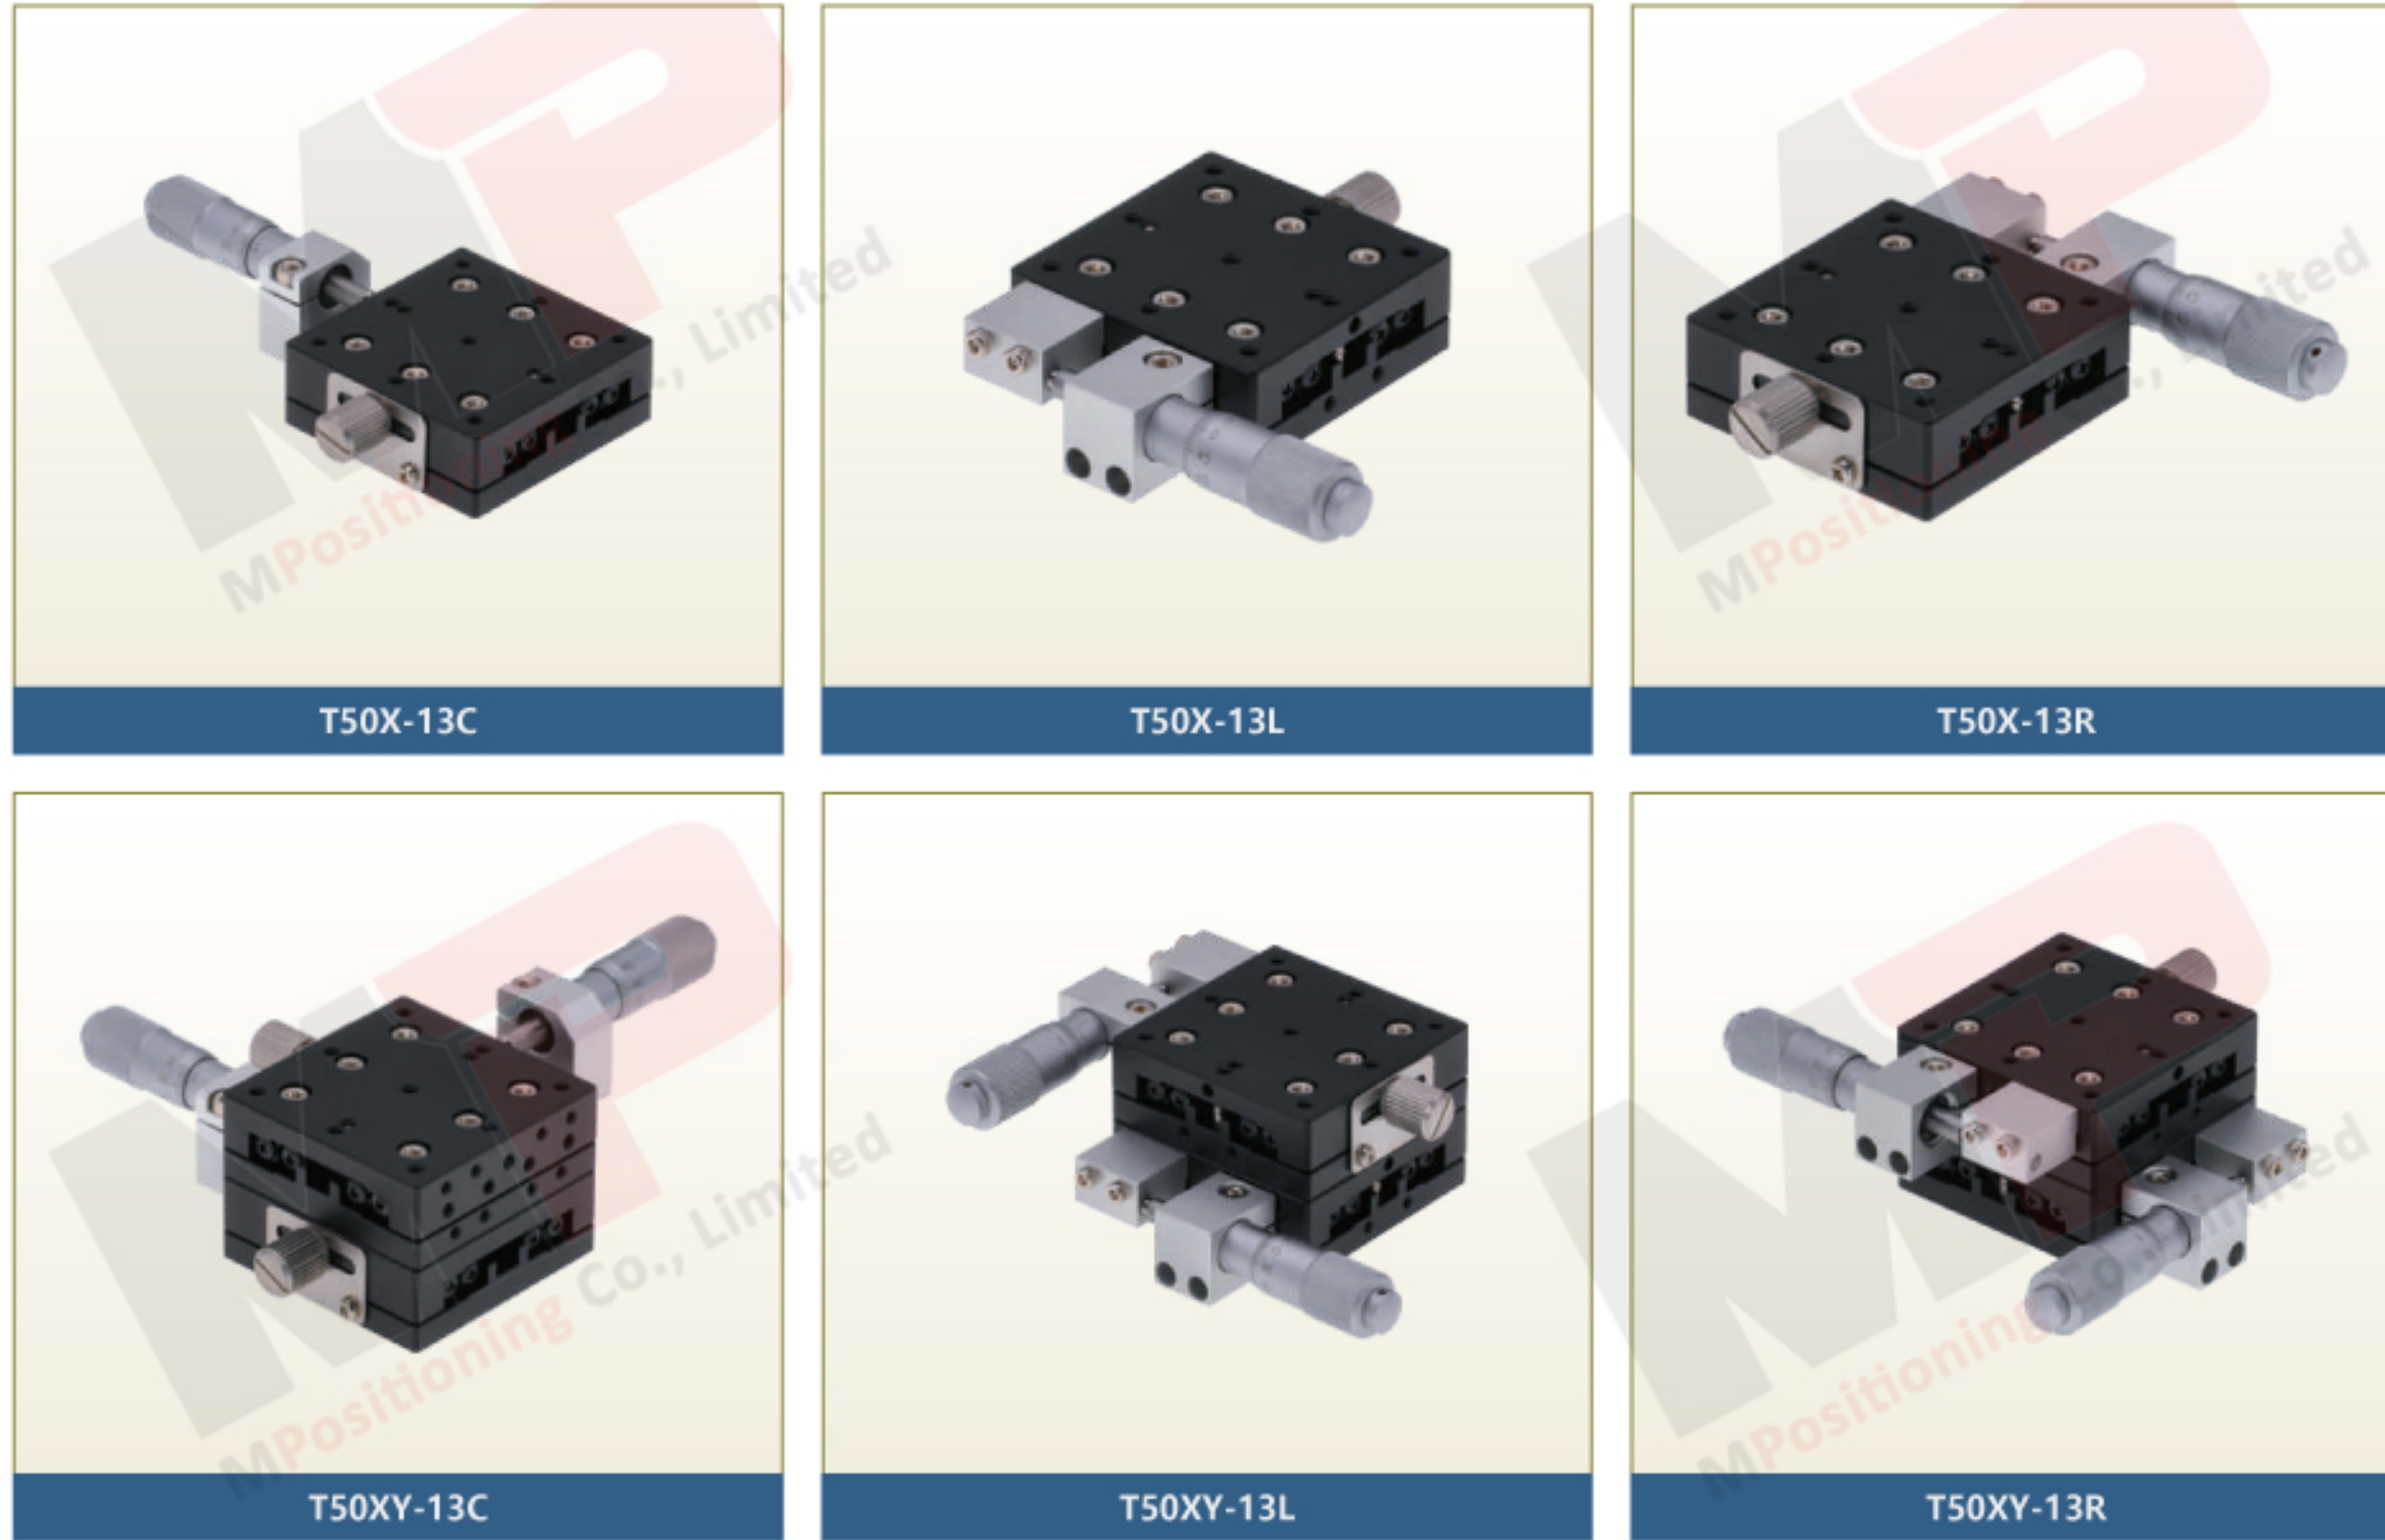

► SPECIFICATIONS

	T50X-13C	T50X-13L	T50X-13R	T50XY-13C	T50XY-13L	T50XY-13R
Moving Direction		X			X & Y	
Travel Range	±6.50 mm					
Platform Size	50 mm x 50 mm					
Drive Mechanism	Micrometer Head with 0.50 mm of Pitch					
Bearing Construction	Crossed-Roller Bearings					
Material, Finish	Aluminium Alloy, Black Anodized					
Thickness	18 mm			36 mm		
Minimum Readout	0.01 mm					
Moving Flatness	≤ 0.01 mm/13 mm					
Flatness	0.02 mm			0.04 mm		
Max. Load Capacity	4.5 kgf					
Weight	0.20 kg			0.40 kg		

Manual Linear Stages, X & XY axes (Crossed-Roller Bearings)

