


Manual Linear Stages, X & XY axes (Crossed-Roller Bearings)



► SPECIFICATIONS

	T100X-25C	T100X-25L	T100X-25R	T100XY-25C	T100XY-25L	T100XY-25R
Moving Direction		X				X & Y
Travel Range	±12.50 mm					
Platform Size	100 mm x 100 mm					
Drive Mechanism	Micrometer Head with 0.50 mm of Pitch					
Bearing Construction	Crossed-Roller Bearings					
Material, Finish	Aluminium Alloy, Black Anodized					
Thickness	20 mm			40 mm		
Minimum Readout	0.01 mm					
Moving Flatness	≤ 0.02 mm/25 mm					
Flatness	0.03 mm			0.06 mm		
Max. Load Capacity	10.0 kgf					
Weight	0.70 kg			1.40 kg		

Manual Linear Stages, X & XY axes (Crossed-Roller Bearings)

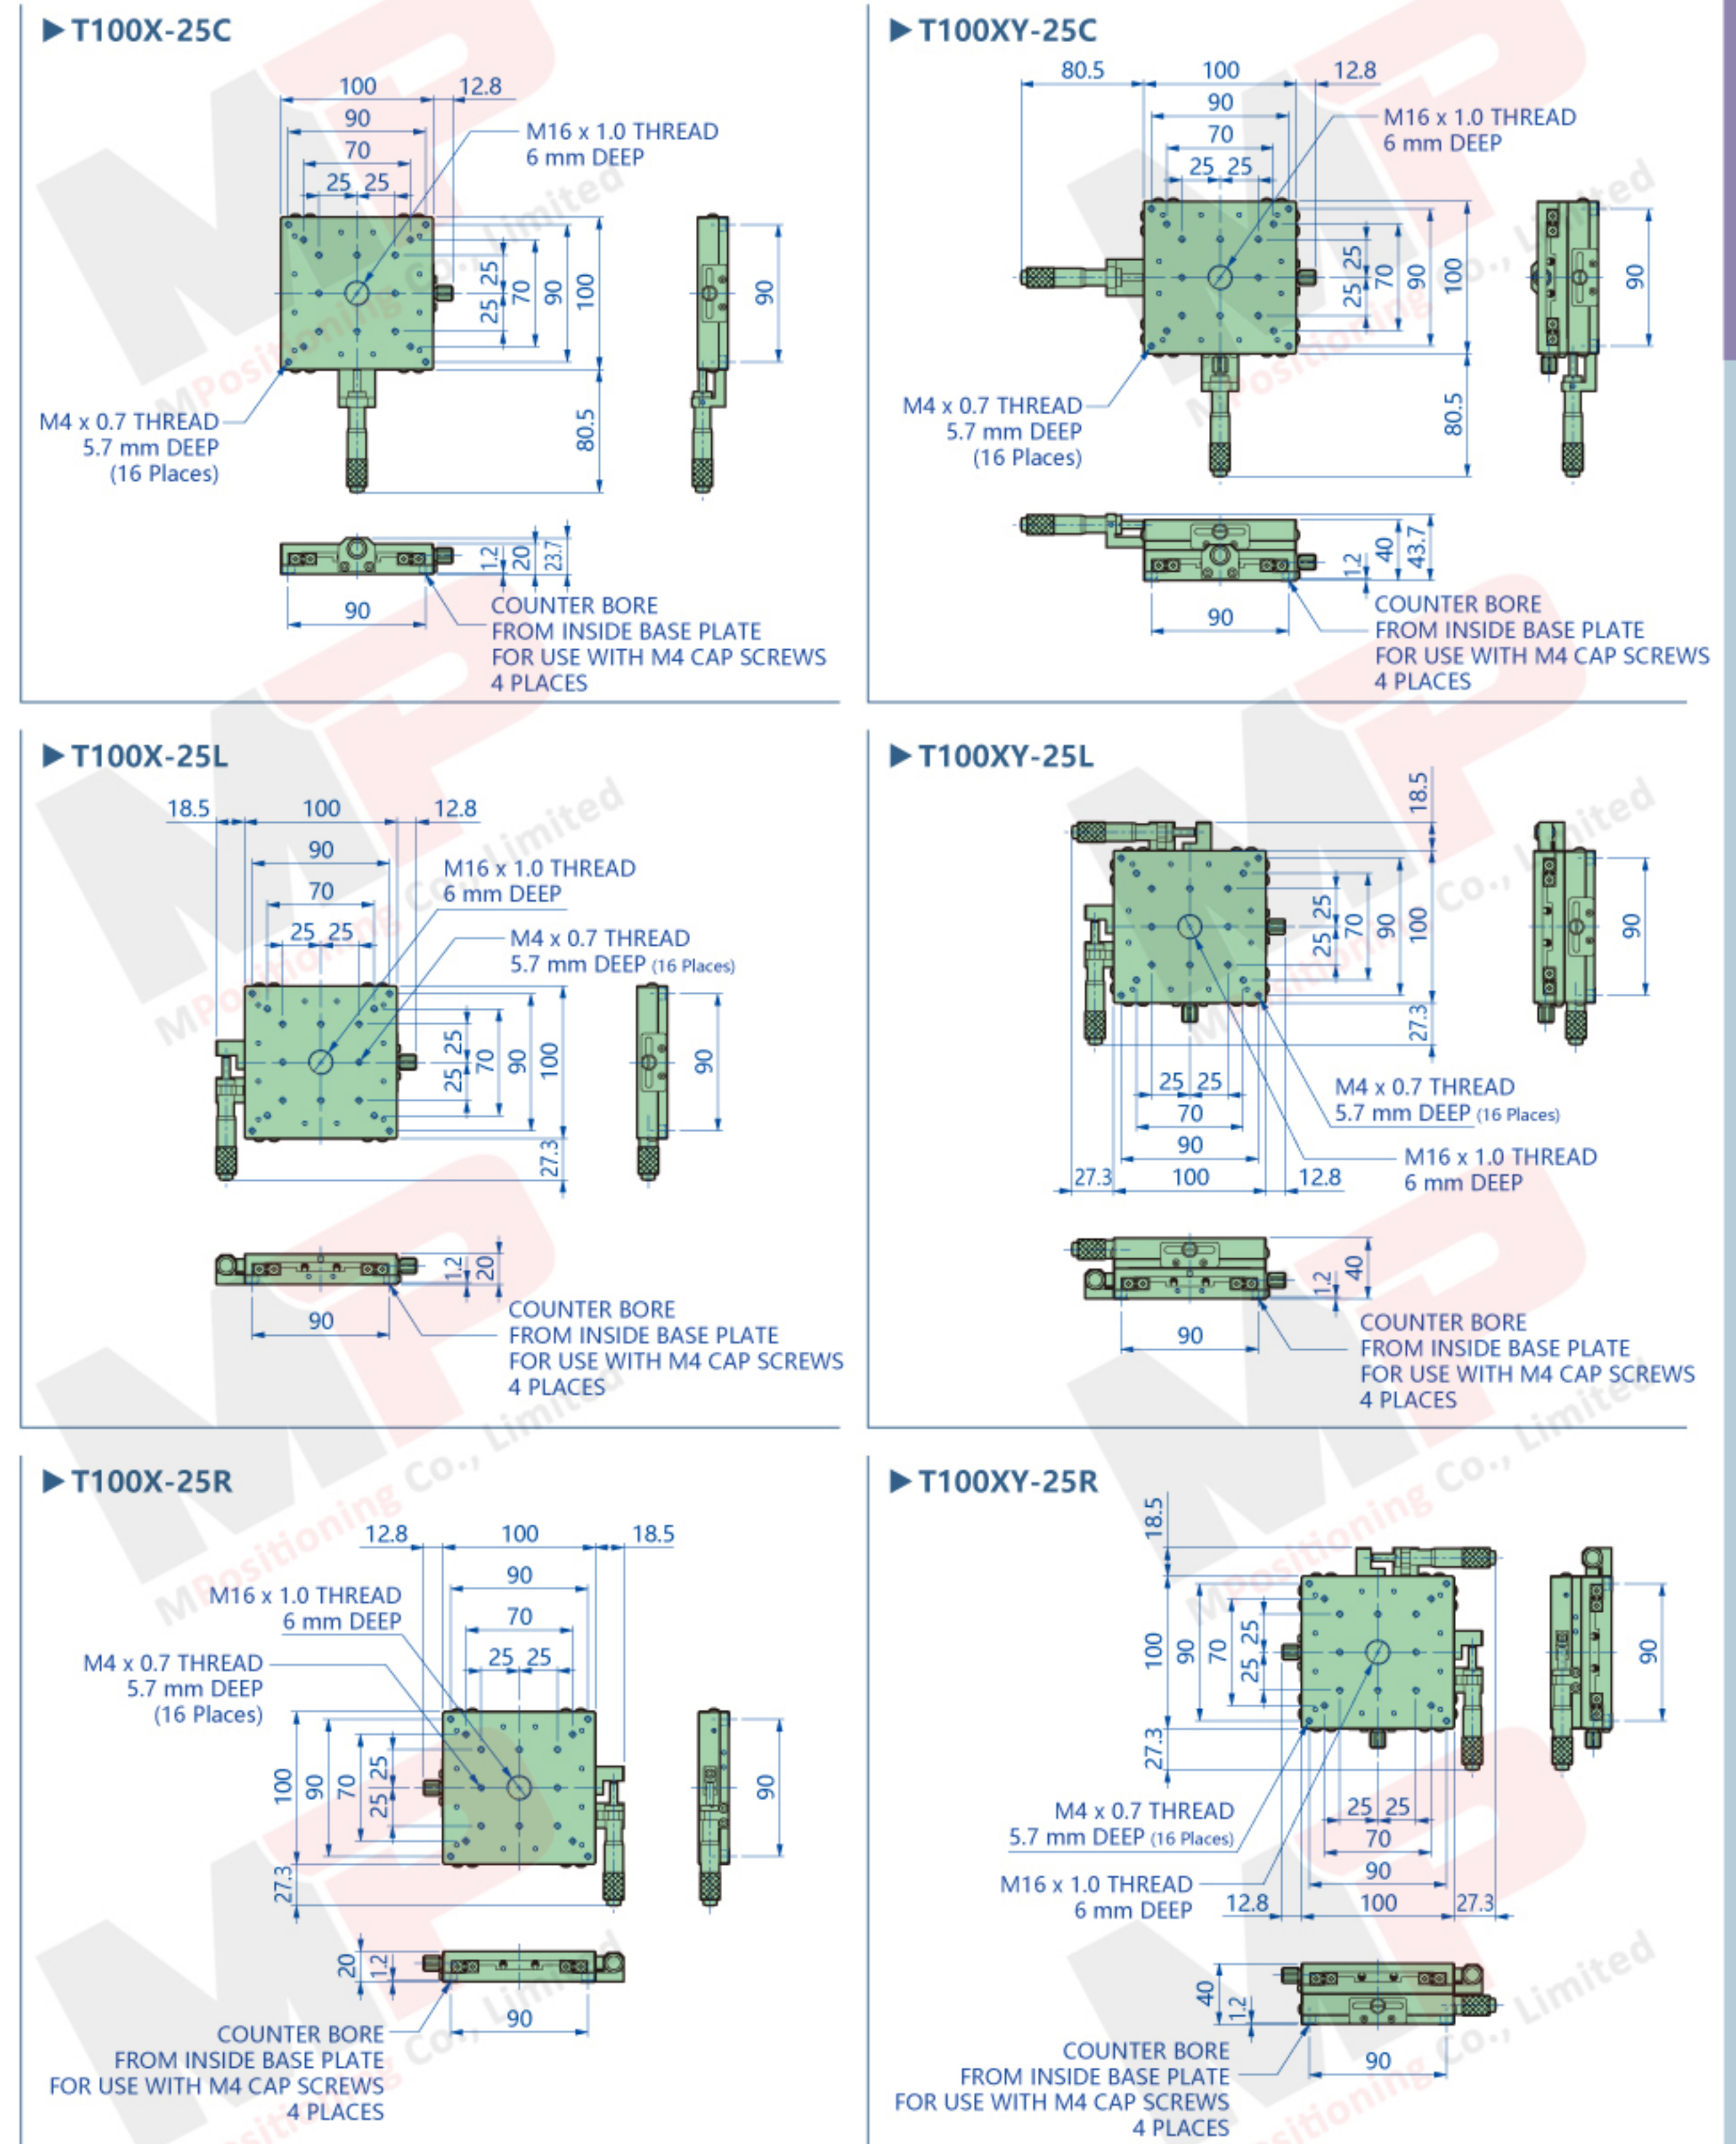

Manual Linear Stages

Manual Linear Stages