


Manual Linear Stages, X axis (Crossed-Roller Bearings)

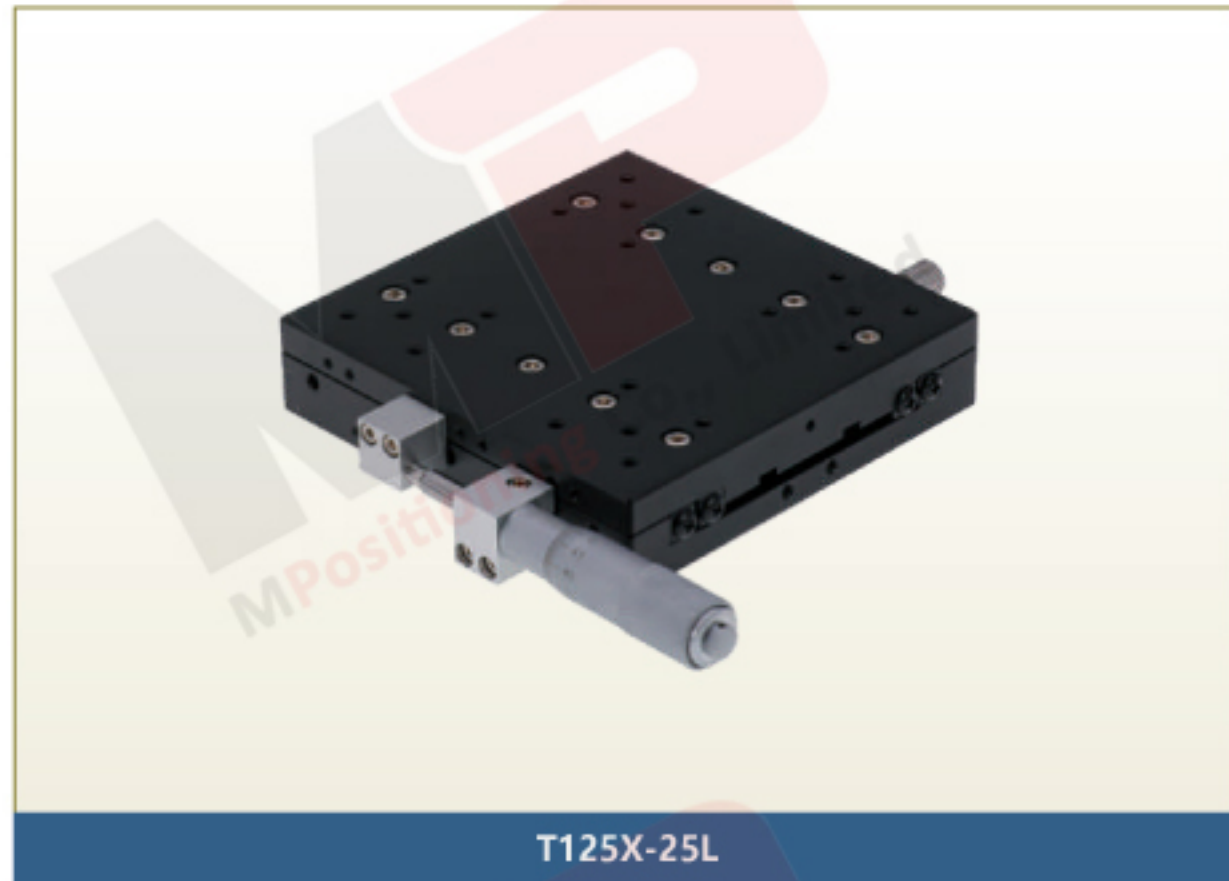


► SPECIFICATIONS

| | T125X-25C | T125X-25L | T125X-25R |
|----------------------|-----------|---------------------------------------|-----------|
| Moving Direction | | X | |
| Travel Range | | ±12.5 mm | |
| Platform Size | | 125 mm x 125 mm | |
| Drive Mechanism | | Micrometer Head with 0.50 mm of Pitch | |
| Bearing Construction | | Crossed-Roller Bearings | |
| Material, Finish | | Aluminium Alloy, Black Anodized | |
| Thickness | | 28 mm | |
| Minimum Readout | | 0.01 mm | |
| Moving Flatness | | ≤ 0.02 mm/25 mm | |
| Flatness | | 0.04 mm | |
| Max. Load Capacity | | 18.0 kgf | |
| Weight | | 1.50 kg | |


Manual Linear Stages, X axis (Crossed-Roller Bearings)



► T125X-25C

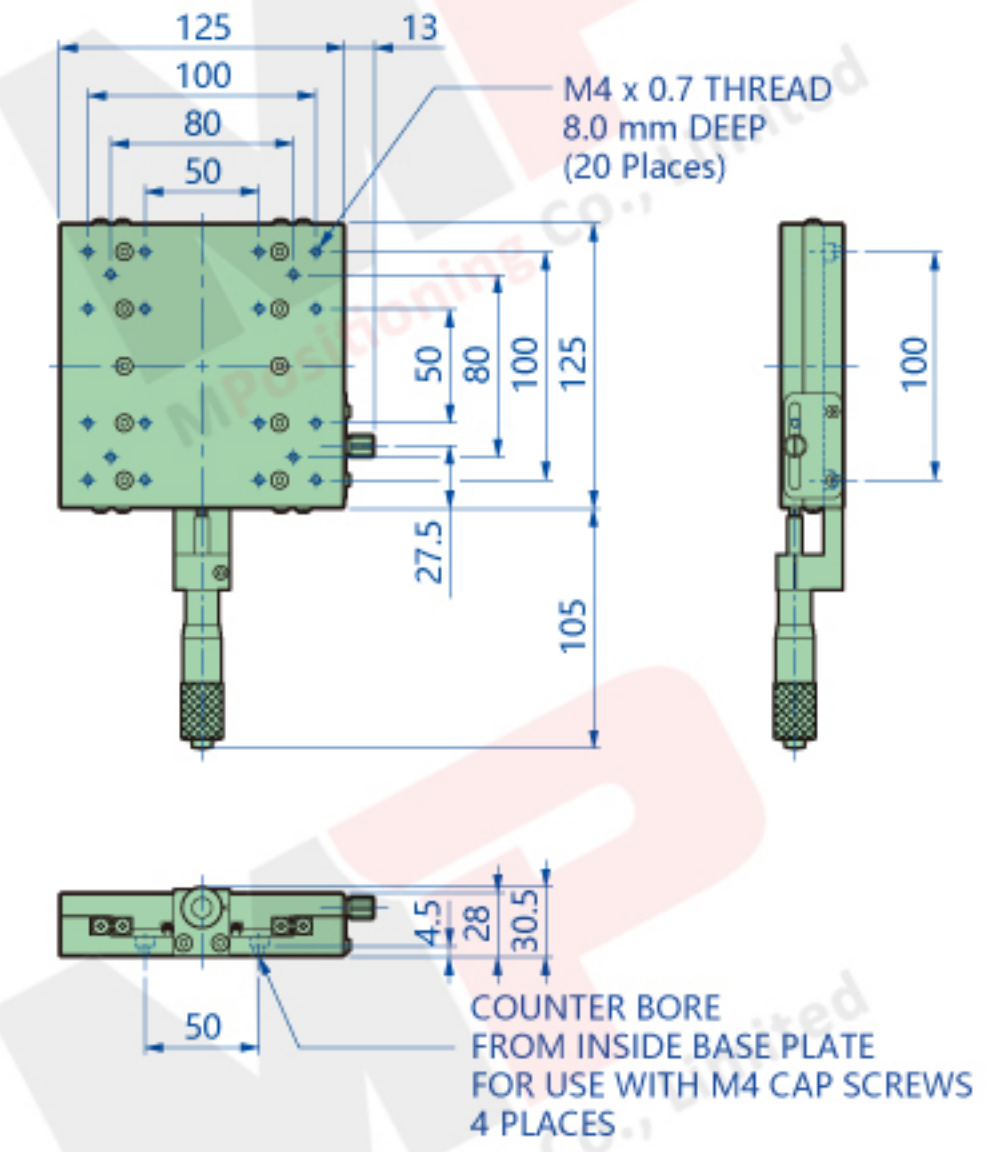

► T125X-25L

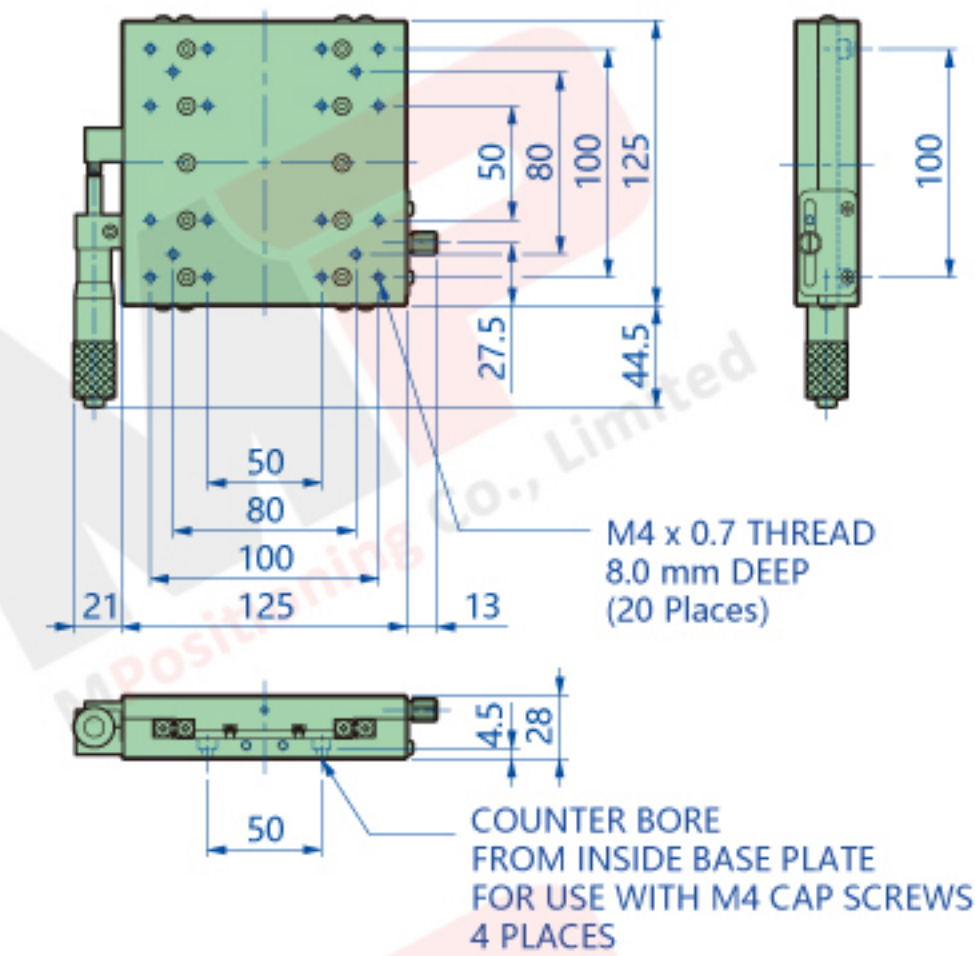

► T125X-25R

